


IR Vandal-proof Dome Camera

Features

- Rugged and Vandal-proof
- Built-in Vari-Focal or Board Lens
- Day & Night (option: IR-Cut filter Removable, ICR)
- 3-Axis Mechanism for free lens rotation
- Built-in 24 pieces IR-LED
- Effective range up to 20M
- Weatherproofing criterion IP 66

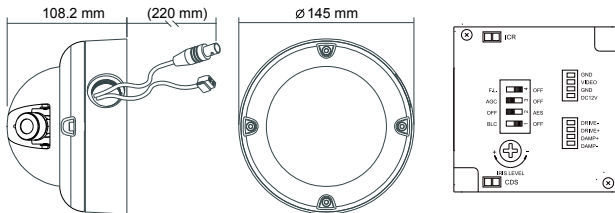

Option :



RYK-8719-3
L Type Bracket

Model No.	IV-D702
Image Device	1/3" Color Sony EX-View HAD (Hi-Res.)
Picture Elements	NTSC:768x494, PAL:752x582
Resolution	470 TVL
Min. Illumination	0.15 Lux F2.0 (Day),/ 0 Lux (IR On)
S/N Ratio	More than 48dB
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000
Flickless Mode	On/Off (NTSC:1/100, PAL:1/120)
Gamma	0.45
Iris Control	DC Drive (for VR model)
Lens Furnished	VR model : Vari-Focal 3.7~12mm (ICR) / F1.6~3.0, Wide:71.6°x55.8°, Tele:23.8°x17.9° (HxV) Other model: Board Lens 3.6mm / F2.0 (option:2.5/4.3/6/8/12/16mm)
White Balance	Auto
Gain Control	High / Low (for VR model), Auto (for other model)
Back Light Comp.	On / Off
Sync. System	Internal
Video Output	1 Vp-p / 75 Ohms
Infrared Luminary	24 pieces IR-LED
Wavelength	850 nm
Illumination Distance	20 M
Power Supply	DC12V ± 10%
Power Consumption	IR On: 400mA max. IR Off: 200mA max.
Operating Temp.	-10°C ~ 50°C